




Ligao Mechanical Bearing Co., Ltd

INA LASE20-N bearing units

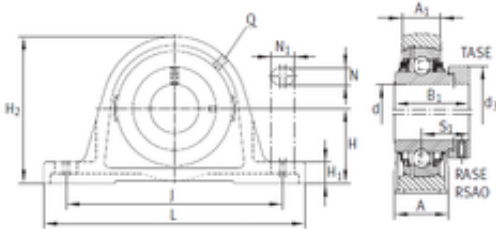

LASE20-N Bearing 2D drawings and 3D CAD models

Bearing No. LASE20-N

Bore Diameter	20 mm
d	20 mm
S1	26,6 mm
Thread (Q)	Rp1/8
d3	33 mm
A	32 mm
A1	19 mm
B1	43,7 mm
H	33,3 mm
H1	14,5 mm
H2	64 mm
J	97 mm
L	130 mm
N	11 mm
N1	19 mm
Weight	0,63 Kg
Basic dynamic load rating (C)	12,8 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.874
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



Ligao Mechanical Bearing Co., Ltd

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE20KLLHB
Seals	Double Non Contact Labyrinth
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Radial Standard Shaft Height Extended Inner Race Metric With Set Screw
Long Description	2 Bolt Pillow Block; 20MM Bore; 33.3MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 87MM Minimum Bolt Spacing; 105MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Non Contact
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	LASE20
Weight / LBS	1.323
Bore	0.787 Inch 20 Millimeter
Bolt Spacing Minimum	3.425 Inch 87Millimeter
Length Thru Bore	1.72 Inch 43.7 Millimeter
Base to Center Height	1.311 Inch 33.3 Millimeter
Nominal Bolt Center to Center	3.8 Inch 97 Millimeter



Ligao Mechanical Bearing Co., Ltd

Bolt Spacing Maximum	4.134 Inch 105Millimeter
----------------------	----------------------------